


5514

LUMINÁRIA SALIENTE

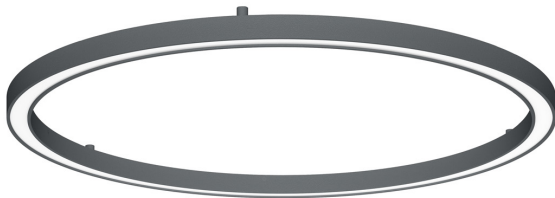


Luminária com distribuição direta do fluxo. Difusor em acrílico opal e corpo em alumínio extrudido, com epóxi poliéster.

Luminaire with direct light flow distribution. Diffuser in opal acrylic and extruded aluminum body, with epoxy polyester

Luminaria con distribución directa de flujo de luz. Difusor en acrílico opal y cuerpo en aluminio extruido, con epoxi poliéster.

Luminaire avec distribution directe du flux d'éclairage. Diffuseur en acrylique opale et corps en aluminium extrudé, avec époxy polyester.

DESENHO TÉCNICO . TECHNICAL DRAWING . DISEÑO TÉCNICO . DESSIN TECHNIQUE .



650° · LED modulo 50 000 @L80, B10, TA 25°C
 Eficácia 141 lm/W com $T_p = 65^\circ$
 CRI>80 · UGR <19

Normas: EN 60598-1, EN 60598-2-1

CORES E ACABAMENTOS . COLORS AND FINISHES . COLORES Y ACABADOS . COULEURS ET FINITIONS .

- 1 Branco
White . Blanco . Blanc .
- 2 Cinza
Gray . Cinza . Gris .
- Grafite
Graphite . Grafito . Graphite .
- 9 Preto
Black . Negro . Noir .
- 0 RAL sob consulta
RAL on request . RAL bajo consulta . RAL sur demande .
- Opalino
Opaline . Opalino . Opal .



CODE	LAMP	D (mm)
5514.133.xXL	33,4W - 6021 lm	650
5514.150.xXL	50W - 9031 lm	950
5514.166.xXL	66,7W - 12042 lm	1250
5514.188.xXL	88,9W - 16056 lm	1500

Driver remoto
 Remote driver
 Controlador remoto
 Driver à distance