


## 2568



DESENHO TÉCNICO . TECHNICAL DRAWING . DISEÑO TÉCNICO . DESSIN TECHNIQUE .

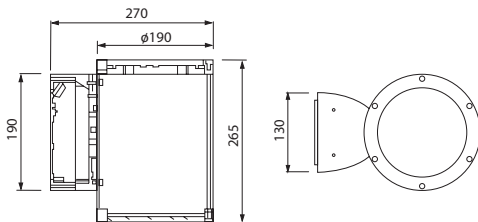

APLICAÇÃO | DIREÇÃO . APPLICATION | DIRECTION . APLICACIÓN | DIRECCIÓN . APPLICATION | DIRECTION .



Aplicação saliente | Projeção de luz descendente  
Surface Application | Downward light projection  
Aplicación de superficie | Proyección de luz descendente  
Application saillante | Proyección de lumière descendant

FOTOMETRIA . PHOTOMETRY . FOTOMETRÍA . PHOTOMÉTRIE .

CODE	LAMP	FINISH	PRICE (€)
2568.130.xML	LED 30W - 2600 lm	Color   Microprismatic	225,45

### LUMINÁRIA SALIENTE

Luminária em alumínio.  
Ângulo de abertura: 50°.

Aluminum luminaire.  
Beam angle: 50°.

Luminaria de aluminio.  
Angulo de apertura: 50°.

Luminaire en aluminium.  
Angle de faisceau: 50°.

SISTEMA ELÉTRICO . ELECTRICAL SYSTEM . SISTEMA ELECTRICO . SYSTÈME ÉLECTRIQUE .



DRIVER 220-240VAC-50/60Hz

ÍNDICE PROTEÇÃO . PROTECTION INDEX . ÍNDICE DE PROTECCIÓN . INDICE DE PROTECTION .

**IP65**

INFORMAÇÃO LED . LED INFORMATION . INFORMACIÓN LED . INFORMATIONS LED .



NORMAS . NORMS . NORMAS . NORMES .

Diretivas: 2006/95/CE, 2004/108/CE "Compatibilidade Electromagnética"

Normas: EN 60598-1 (2008) + A11 (2009), EN 60598-2-1:1999

CORES E ACABAMENTOS . COLORS AND FINISHES . COLORES Y ACABADOS . COULEURS ET FINITIONS .

- 1 Branco . White . Blanco . Blanc .
- 7 Grafite . Graphite . Grafito . Graphite .
- 9 Preto . Black . Negro . Noir .
- M Microprismático . Microprismatic . Microprismo . Microprismatique .

EFICIÊNCIA ENERGÉTICA . ENERGY EFFICIENCY . EFICIENCIA ENERGETICA . EFFICACITÉ ÉNERGÉTIQUE .

